

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 0 748 460 B1**

(12)

## EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention  
of the grant of the patent:

**04.11.1998 Bulletin 1998/45**

(21) Application number: **95909894.8**

(22) Date of filing: **02.03.1995**

(51) Int Cl.<sup>6</sup>: **G02B 6/00, G02B 6/44**

(86) International application number:  
**PCT/GB95/00449**

(87) International publication number:  
**WO 95/23987 (08.09.1995 Gazette 1995/38)**

(54) **OPTICAL FIBRE CUSTOMER LEAD IN**

**FASEROPTISCHER TEILNEHMERANSCHLUSS**

**RACCORDMENT DE CLIENT EN FIBRE OPTIQUE**

(84) Designated Contracting States:  
**BE CH DE ES FR GB IT LI NL SE**

(30) Priority: **02.03.1994 EP 94301511**

(43) Date of publication of application:  
**18.12.1996 Bulletin 1996/51**

(73) Proprietor: **BRITISH TELECOMMUNICATIONS  
public limited company  
London EC1A 7AJ (GB)**

(72) Inventors:

- **FROST, Peter, Lewis, John**  
**Ipswich Suffolk IP5 7QF (GB)**
- **JESSOP, Paul, David**  
**Clacton-on-Sea Essex CO15 3PW (GB)**

(74) Representative:  
**Garrison, Christopher Sinclair et al**  
**British Telecommunications plc,**  
**BT Group Legal Services,**  
**Intellectual Property Department,**  
**8th Floor,**  
**120 Holborn**  
**London EC1N 2TE (GB)**

(56) References cited:  
**DE-A- 3 911 095 DE-U- 9 114 452**  
**US-A- 4 596 381**

- **REVIEW ELECTRICAL COMMUNICATION  
LABORATORIES, vol.32, no.4, 1984, JP pages  
636 - 645 S.KUKITA 'design and performance of  
optical drop and indoor cable'**

**EP 0 748 460 B1**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

This invention relates to optical fibre customer lead in (CLI), that is to say to the way in which optical fibres (such as telecommunications optical fibres) are led into customers' premises.

In the United Kingdom, the telecommunications network includes a trunk network which is substantially completely constituted by optical fibre, and a local access network which is substantially completely constituted by copper pairs. Eventually, it is expected that the entire network, including the access network, will be constituted by fibre.

The ultimate goal is a fixed, resilient, transparent telecommunications infrastructure for the optical access network, with capacity for all foreseeable service requirements. One way of achieving this would be to create a fully-managed fibre network in the form of a thin, widespread overlay for the whole access topography, as this would exploit the existing valuable access network infrastructure. Such a network could be equipped as needs arise, and thereby could result in capital expenditure savings, since the major part of the investment will be the provision of terminal equipment on a 'just in time' basis. It should also enable the rapid provision of extra lines to new or existing customers, and flexible provision or reconfiguration of telephony services.

In order to be completely future proof, the network should be single mode optical fibre, with no bandwidth limiting active electronics within the infrastructure. Consequently, only passive optical networks (PONs) which can offer this total transparency and complete freedom for upgrade, should be considered.

In a PON, a single optical fibre is fed out from the exchange head-end (HE), this fibre being fanned out via passive optical splitters at cabinets and distribution points (DPs) to feed optical network units (ONUs). The ONUs can be in customers' premises, or in the street serving a number of customers. The use of optical splitters enables sharing of feeder fibre and exchange based optical line termination (OLT) equipment, thereby giving PONs a cost advantage. In the United Kingdom, simplex PONs are planned, so that each customer is serviced by a pair of optical fibres.

In order to achieve the goal of providing a fixed, resilient, transparent telecommunications optical fibre access network, it will be important to minimise the installation costs at each part of the network. The present invention is concerned with minimising the cost of installation of fibre from a customer's premises to the nearest network node, and in particular to a cost-effective way of getting fibre into a customer's premises. In this connection, it should be noted that the preferred way of installing fibre is by the well known fibre blowing process (see EP 108590). In this process, a fibre unit (usually a two-fibre unit for residential premises) is blown through a small diameter (5mm) polyethylene tube.

The main problem to be overcome in feeding such

a tube into a customer's premises arises from the fact that the tube must be fed along the outer wall of the premises and then turned through 90°, so as to pass through a hole formed in the wall. It must then be turned through 90° so that it can be fed along the inner wall of the premises. In each case, the turning must be accomplished without giving rise to optical loss in the blown-in fibre when it is live.

A known CLI apparatus is constituted by a pair of CLI units, one for fixing to the external surface of a customer's premises wall and one for fixing to the internal surface of that wall. Each of these units is fairly large, as it accommodates a complete loop of tube (fibre), the loop having a radius greater than the minimum bend radius (100mm) for this type of tube. The hole drilled through the wall between the two CLI units has a fairly large diameter so as to accommodate a bend limiting conduit through which the tube (fibre) passes between the two units. Not only are these CLI units relatively large and require the drilling of a relatively large diameter hole, but they are also expensive and time-consuming to fit. Presently, they are used for business premises CLI, where their cost can be justified by the number of lines normally installed for such premises. For residential customers, however, which usually have only one line, these units are far too expensive. In this connection, it should be noted that there are 14 million residential premises in the United Kingdom.

Another type of optical fibre guide is known from REVIEW ELECTRICAL COMMUNICATION LABORATORIES, vol.32, no.4, 1984, JP, pages 636 - 645; S. KUKITA et al: 'Design and Performance of Optical Drop and Indoor Cables'. There are discussed allowable minimum bending radii, and Fig.17 illustrates a guide for indoor applications.

The present invention provides a customer lead in unit for guiding an optical fibre transmission line through an aperture in the wall of a customer's premises, the unit comprising a hollow wall plug which is frictionally engageable within said aperture, and a pair of complementary bend control pieces, each bend control piece having a bend control surface formed with a curved bend control groove whose curvature conforms with minimum bend radius requirements for the optical fibre transmission line, the bend control pieces being formed with engagement portions which inter-engage with a complementary engagement portion formed at one end of the wall plug to grip the wall plug between the two bend control pieces, and the bend control grooves being positioned so as to define a bend control channel that is contiguous with the hollow interior of the wall plug when the wall plug is gripped by the two bend control pieces.

Conveniently, a flange formed at said one end of the wall plug constitutes the complementary engagement portion, and each of the bend control pieces is formed with a complementary groove formed in its bend control surface, said grooves constituting the engagement portions.

The invention further provides customer lead in apparatus for guiding an optical fibre transmission line through an aperture in the wall of a customer's premises, the apparatus comprising two customer lead in units each as defined above, one unit being positioned at the mouth of the aperture at the external surface of the wall, the other being positioned at the mouth of the aperture at the internal surface of the wall.

The invention will now be described in greater detail, by way of example, with reference to the accompanying drawings, in which:-

Figure 1 is a exploded perspective view of a wall plug and a bend control piece of a CLI unit constructed in accordance with the invention;  
Figure 2 is a plan view of the CLI unit of Figure 1; and  
Figure 3 is a cross-section taken through the cavity wall of a telecommunications network customer, and shows two CLI units of the type shown in Figures 1 and 2 in place to guide optical fibre into that customer's premise.

Referring to the drawings, Figures 1 and 2 show a CLI unit C constituted by an externally-fluted wall plug 1 and a pair of complementary bend control pieces 2. In use, the bend control pieces 2 fit together with complementary surfaces 2a thereof in engagement. The wall plug 1 and the two bend control pieces 2 are each moulded from an ultra violet (uv) stable plastics material such as polypropylene. One end of the wall plug 1 is formed with an annular flange 1a, this flange being a mating fit within complementary recesses 3 formed in the surfaces 2a of the bend control pieces 2. The wall plug 1 is formed with an axial bore 1b through which, in use, a tube containing optical fibre can pass. When the CLI unit C is assembled (with the flange 1a of the wall plug 1 positioned within the recesses 3 of the bend control pieces 2, and with the surfaces 2a in face-to-face engagement), the mouth of the bore 1b leads to a curved channel defined by a pair of complementary grooves 4 formed in the surfaces 2a. When in the assembled position, the CLI unit C can be fixed to the wall of a customer's premises by means of screws (not shown) passing through aligned apertures 5 pre-formed in the bend control pieces 2. The screws also act to fix the two bend control pieces 2 together around the flange 1a of the wall plug 1. When fixed to the wall, the engagement of the flange 1a within the recesses 3 holds the wall plug 1 firmly with respect to the bend control pieces 2.

The grooves 4 are such as to curve through 90° with a radius of curvature which is 30mm (that is to say the minimum bend radius for the standard signal mode optical fibre normally used for telecommunications). The grooves 4 have a diameter of 5.2mm so as to accommodate the tubing 6 (see Figure 3) through which blown fibre is installed. The CLI unit C thus constitutes a simple device for guiding optical fibre through 90° without sub-

jecting that fibre to bends which would cause a significant optical loss.

Figure 3 shows two CLI units C positioned on opposite sides of an external cavity wall of a customer's premises, the wall plugs 1 of the units frictionally fitting within 13mm bores 7 drilled in the inner and outer cavity wall portions 8a and 8b respectively. As shown in Figure 3, the blown fibre tubing 6 passes along the inside surface of the inner cavity wall portion 8a, through each of the CLI units C, and then along the outside surface of the outer cavity wall portion 8b. The tubing 6 can be fixed to the wall portions 8a and 8b by any suitable means.

## 15 Claims

1. A customer lead in unit for guiding an optical fibre transmission line through an aperture in the wall of a customer's premises, the unit comprising a hollow wall plug (1) which is frictionally engageable within said aperture, and a pair of complementary bend control pieces (2) arranged to fit together with complementary surfaces (2a) thereof in engagement, each bend control piece having a bend control surface formed with a curved bend control groove (4) whose curvature conforms with minimum bend radius requirements for the optical fibre transmission line, the bend control pieces being formed with engagement portions which inter-engage with a complementary engagement portion (1a) formed at one end of the wall plug to grip the wall plug between the two bend control pieces, and the bend control grooves being positioned so as to define a bend control channel that is contiguous with the hollow interior of the wall plug when the bend control pieces are mounted together and the wall plug is gripped by the two bend control pieces.
2. A customer lead in unit as claimed in claim 1, wherein a flange formed at said one end of the wall plug constitutes the complementary engagement portion, and each of the bend control pieces (2) is formed with a complementary groove formed in its bend control surface, said grooves constituting the engagement portions.
3. Customer lead in apparatus for guiding an optical fibre transmission line through an aperture in the wall of a customer's premises, the apparatus comprising two customer lead in units each as claimed in claim 1 or claim 2, one unit being positioned at the mouth of the aperture at the external surface of the wall, the other being positioned at the mouth of the aperture at the internal surface of the wall.

## Patentansprüche

1. Teilnehmeranschlußeinheit zum Führen einer optischen Faserübertragungsleitung durch ein Loch in einer Wand eines Raums eines Teilnehmers, wobei die Einheit einen hohlen Wandstecker (1) aufweist, der mit Reibung in dem Loch anbringbar ist, sowie zwei komplementäre Biegungseinstellstücke (2), die ausgebildet sind, bei Eingriff ihrer komplementären Oberflächen (2a) zusammenzupassen, wobei jedes Biegungseinstellstück eine Biegungseinstelloberfläche hat, die mit einer gekrümmten Biegungseinstellrinne (4) ausgebildet ist, deren Krümmung mit den minimalen Biegeradiuserfordernissen für die optische Faserübertragungsleitung übereinstimmt, wobei die Biegungseinstellstücke Eingriffsteile haben, die mit einem komplementären Eingriffsteil (1a) am einen Ende des Wandsteckers zusammenwirken, um den Wandstecker zwischen den beiden Biegungseinstellstücken zu halten, und wobei die Biegungseinstellrillen so positioniert sind, daß sie einen Biegungseinstellkanal bilden, der an die Aushöhlung im Inneren des Wandsteckers angrenzt, wenn die Biegungseinstellstücke zusammengebaut sind und der Wandstecker von den beiden Einstellstücken gehalten wird.
2. Teilnehmeranschlußeinheit nach Anspruch 1, bei der ein Flansch, der an einem Ende des Wandsteckers ausgebildet ist, den komplementären Eingriffsteil bildet, und jedes Biegungseinstellstück (2) mit einer komplementären Rinne ausgebildet ist, die in ihrer Biegungseinstelloberfläche ausgebildet ist, wobei die Rillen die Eingriffsteile bilden.
3. Teilnehmeranschlußvorrichtung zum Führen einer optischen Faserübertragungsleitung durch ein Loch in einer Wand eines Raums eines Teilnehmers, die zwei Teilnehmeranschlußeinheiten nach Anspruch 1 oder 2 aufweist, wobei sich eine Einheit an der Lochöffnung an der äußeren Wandoberfläche und die andere an der Lochöffnung der inneren Wandoberfläche befindet.

de courbure incurvée (4) dont la courbure se conforme aux exigences de rayon de courbure minimum pour la ligne de transmission à fibre optique, les éléments de contrôle de courbure étant munis de parties d'introduction qui s'engagent mutuellement avec une partie d'introduction complémentaire (1a) formée au niveau d'une première extrémité de la fiche murale afin de saisir la fiche murale entre les deux éléments de contrôle de courbure, et les gorges de contrôle de courbure étant positionnées de façon à définir un canal de contrôle de courbure qui est contigu à l'intérieur creux de la fiche murale lorsque les éléments de contrôle de courbure sont montés ensemble et que la fiche murale est saisie par les deux éléments de contrôle de courbure.

2. Unité d'entrée de poste d'abonné selon la revendication 1, dans laquelle une bride formée au niveau de ladite première extrémité de la fiche murale constitue la partie d'introduction complémentaire, et chacun des éléments de contrôle de courbure (2) est muni d'une gorge complémentaire formée dans sa surface de contrôle de courbure, lesdites gorges constituant les parties d'introduction.
3. Dispositif d'entrée de poste d'abonné destiné à guider une ligne de transmission à fibre optique au travers d'une ouverture dans le mur des locaux d'un abonné, le dispositif comprenant deux unités d'entrée de poste d'abonné, chacune selon la revendication 1 ou la revendication 2, une première unité étant positionnée au niveau du débouché de l'ouverture à la surface externe du mur, l'autre étant positionnée au débouché de l'ouverture à la surface interne du mur.

## Revendications

1. Unité d'entrée de poste d'abonné destinée à guider une ligne de transmission à fibre optique au travers d'une ouverture dans le mur des locaux d'un abonné, l'unité comprenant une fiche murale creuse (1) qui peut s'engager par frottement à l'intérieur de ladite ouverture, et une paire d'éléments de contrôle de courbure complémentaires (2) agencés pour s'adapter ensemble, des surfaces complémentaires (2a) de ceux-ci étant en prise, chaque élément de contrôle de courbure présentant une surface de contrôle de courbure munie d'une gorge de contrôle

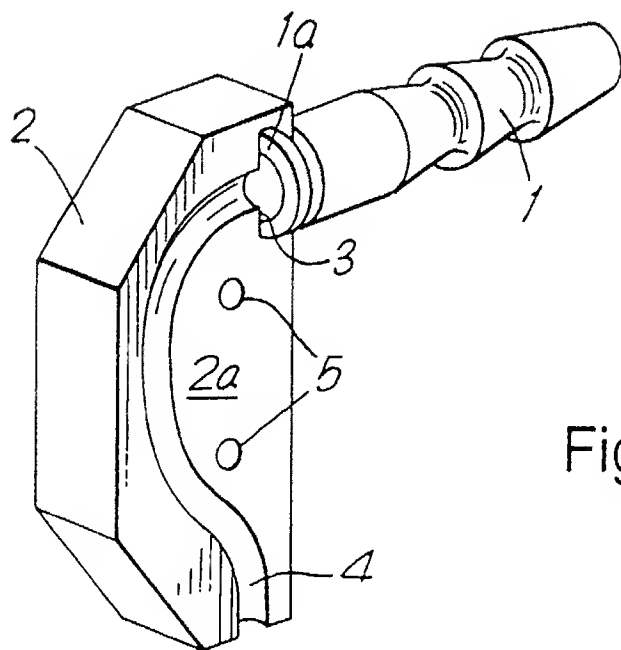


Fig.1

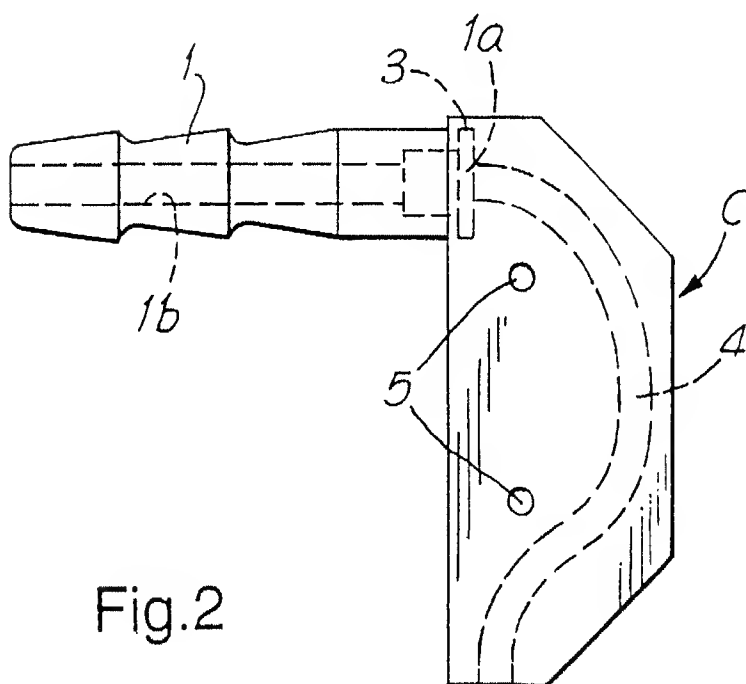


Fig.2

Fig.3.

